


ENDURA[®]

PREMIUM RUBBER FLOORING

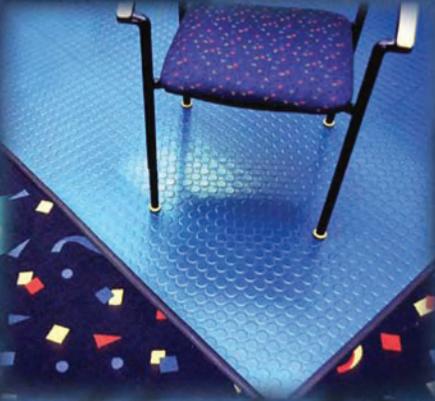


...from
Burke
FLOORING

ENDURA Premium Rubber Flooring
 Color, style and durability...
 in every environment

Endura has been installed worldwide in hundreds of stadiums and arenas, sports and entertainment facilities, schools and universities, government and military sites, as well as in healthcare, industrial, justice and correctional, museum, commercial, office, retail and transportation facilities.



Van Andel Arena, Grand Rapids, Michigan

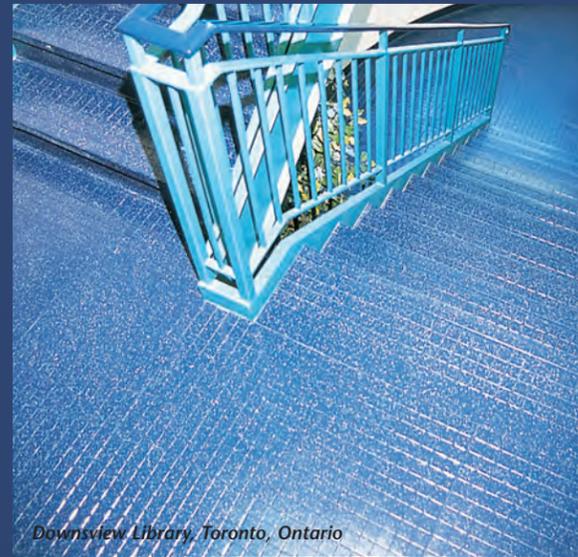

Downsview Library, Toronto, Ontario




Assisted Living Facility, Hopkinton, Massachusetts



Sports Facility, New Orleans, Louisiana

safety

comfort

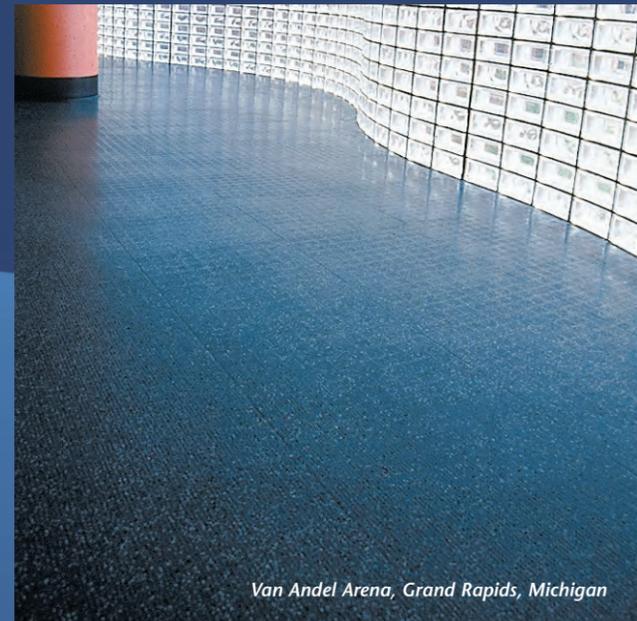

Van Andel Arena, Grand Rapids, Michigan

design



Supermarket Produce Area, Atlanta, Georgia

durability



Food Court, Battle Creek, Michigan



Celestica Corporation, Toronto, Ontario


noise reduction




Downsview Library, Toronto, Ontario



Recreation Center, Battle Creek, Michigan

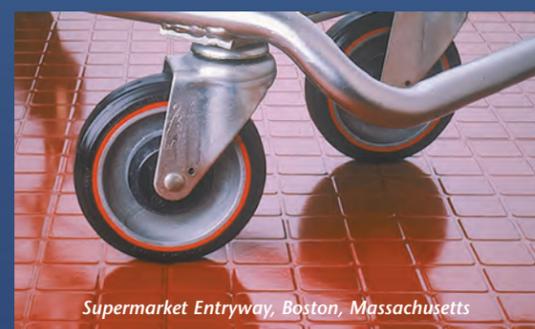


Supermarket Entryway, Boston, Massachusetts

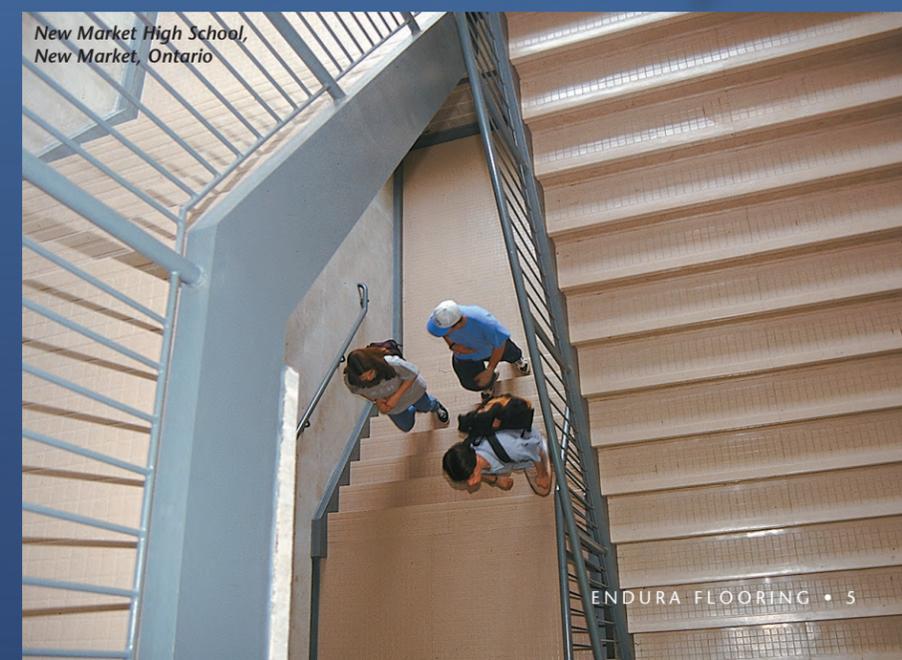


New Market High School, New Market, Ontario


ENDURA STANDARD PROFILES

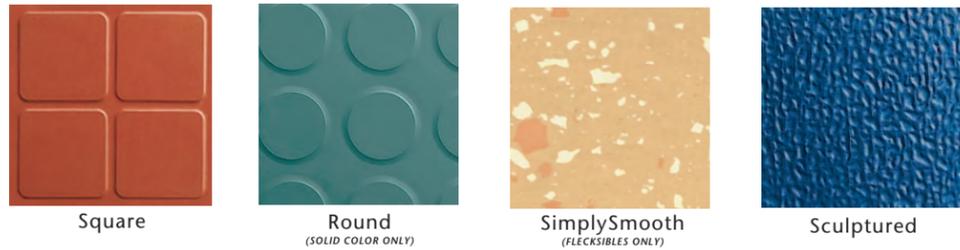


ENDURA SPECIAL ORDER PROFILES (2,500 SQUARE FOOT MINIMUM ORDER REQUIRED)

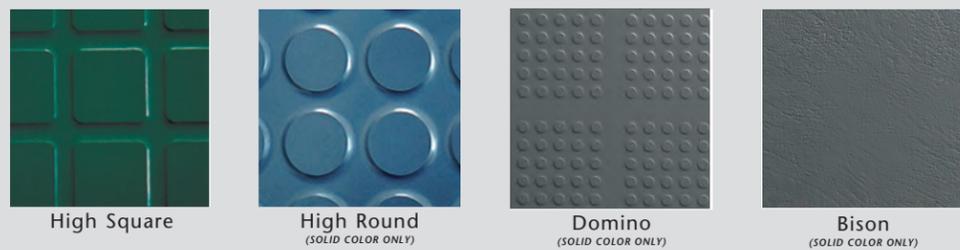

ENDURA STANDARD FLECKSIBLES® COLORS

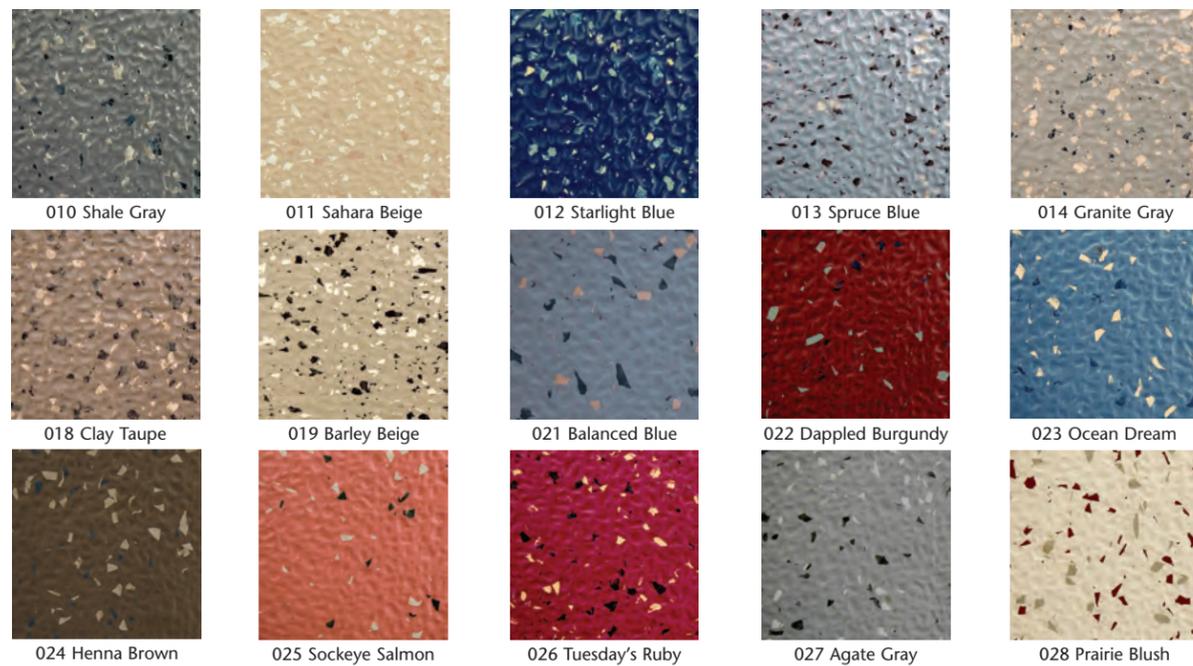

UNI-COLOR® SYSTEM STANDARD SOLID COLORS

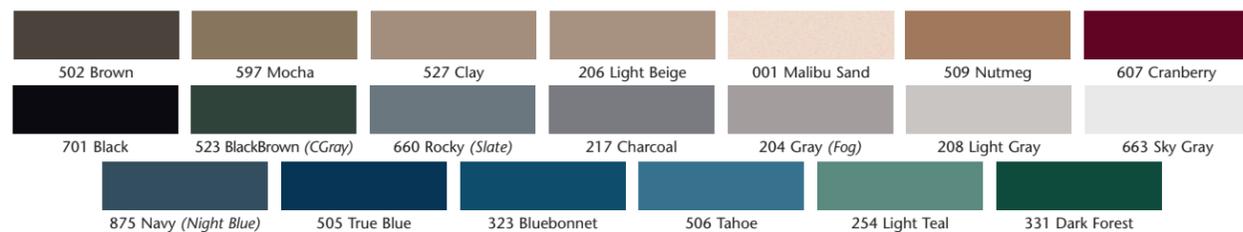

ADDITIONAL COLORS FOR RUBBER TILE & STAIR TREADS



Table of Contents

Standard Colors & Flecksibles®	3	Endura Custom Color Ideas	17
Endura Photo Gallery	4-5	Endura Spectrajet Logos	18
Endura Solid Color Rubber Tile	6-7	Endura UV® Ultra-Violet Light Resistant Tile	18
Endura Solid Color Rubber Stair Treads.....	8-9	Endura FR® Fire Resistant Tile	18
Endura Flecksibles® Rubber Tile	10-11	Endura Spectrajet Designs & Patterns	19
Endura Flecksibles® Rubber Stair Treads	12-13	Endura Adhesives	20
Endura EcoScore® Multifunctional Flooring	14	Maintenance and Warranty	21
Endura SRT® Skate & Spike Resistant Flooring	15	Product Specifications	Back Cover
Endura Unlimited Color	16		


Request Samples and get the Latest Information at:

www.burkeflooring.com

- Go directly to the specific information that is contained in Endura Product Catalogs
- Download PDF files of all printed catalogs and Product Specification Sheets
- View samples of tile patterns and colors
- Review and download or copy specifications in various formats for easy inclusion in the documents of your project
- Request Samples, Literature, Technical Information and Product Updates Online
- Check for product updates, anytime, anywhere.




Uni COLOR SYSTEM

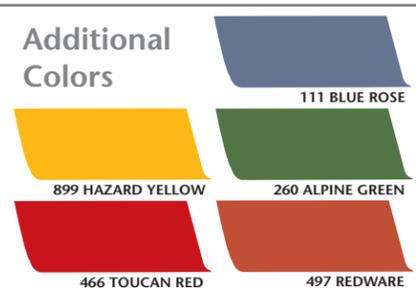

Endura provides impressive durability and comfort in a variety of colors and surface textures. Its unique rubber formulation is highly slip resistant and helps reduce noise from footfall while increasing comfort. Endura's built-in waxes produce a natural luster that requires no waxing or stripping and lowers maintenance costs.


Backed by a ten year warranty, Endura offers one of the best life-cycle flooring values available and is being used worldwide in thousands of commercial, institutional and industrial facilities.

STANDARD PROFILES - SOLIDS

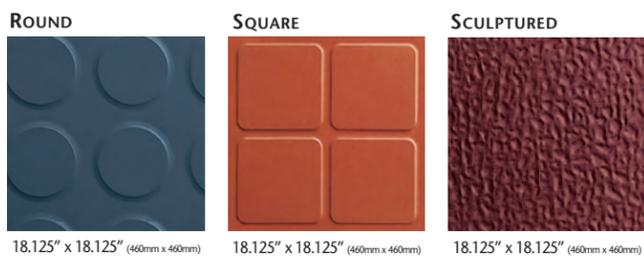

18.125" x 18.125" (460mm x 460mm) 18.125" x 18.125" (460mm x 460mm) 18.125" x 18.125" (460mm x 460mm)

SPECIAL ORDER PROFILES - SOLIDS (2,500 SQ.FT. MINIMUM)

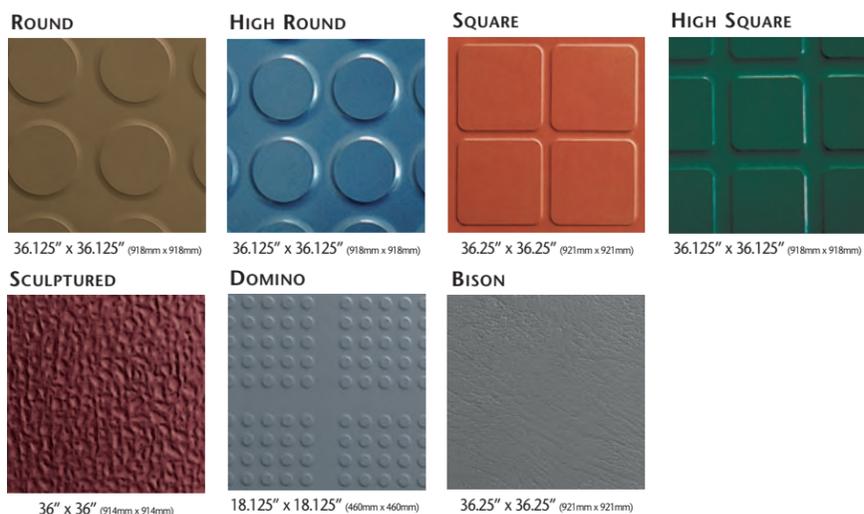

36.125" x 36.125" (918mm x 918mm) 36.125" x 36.125" (918mm x 918mm) 36.25" x 36.25" (921mm x 921mm) 36.125" x 36.125" (918mm x 918mm)
36" x 36" (914mm x 914mm) 18.125" x 18.125" (460mm x 460mm) 36.25" x 36.25" (921mm x 921mm)

TECHNICAL DATA

All rubber flooring products manufactured by Burke meet guidelines established by ADA for walking surfaces and for ramps.


Standard Tile Profiles

Relief Shape	Thickness	Size	Face	Back
Round	.125"	18.125" x 18.125"	.025" Raised Profile	Smooth-Sanded
Square	.125"	18.125" x 18.125"	.025" Raised Profile	Smooth-Sanded
Sculptured	.125"	18.125" x 18.125"	Sculptured	Smooth-Sanded

Special Order Tile Profiles



Round	.125"	36.125" x 36.125"	.025" Raised Profile	Smooth-Sanded
High Round	.180"	36.125" x 36.125"	.050" Raised Profile	Smooth-Sanded
Square	.125"	36.25" x 36.25"	.025" Raised Profile	Smooth-Sanded
High Square	.180"	36.125" x 36.125"	.050" Raised Profile	Smooth-Sanded
Sculptured	.125"	36" x 36"	Sculptured	Smooth-Sanded
Domino	.125"	18.125" x 18.125"	.010" Raised Profile	Smooth-Sanded
Bison	.100"	36.25" x 36.25"	Leather Texture	Smooth-Sanded

Applicable Standards	ASTM F-1344, Class 1A
Indentation Resistance	ASTM F-970 - .000" residual indent at 250 PSI
Flame Resistance	ASTM E-648, Class 1 ASTM E-84, Class B


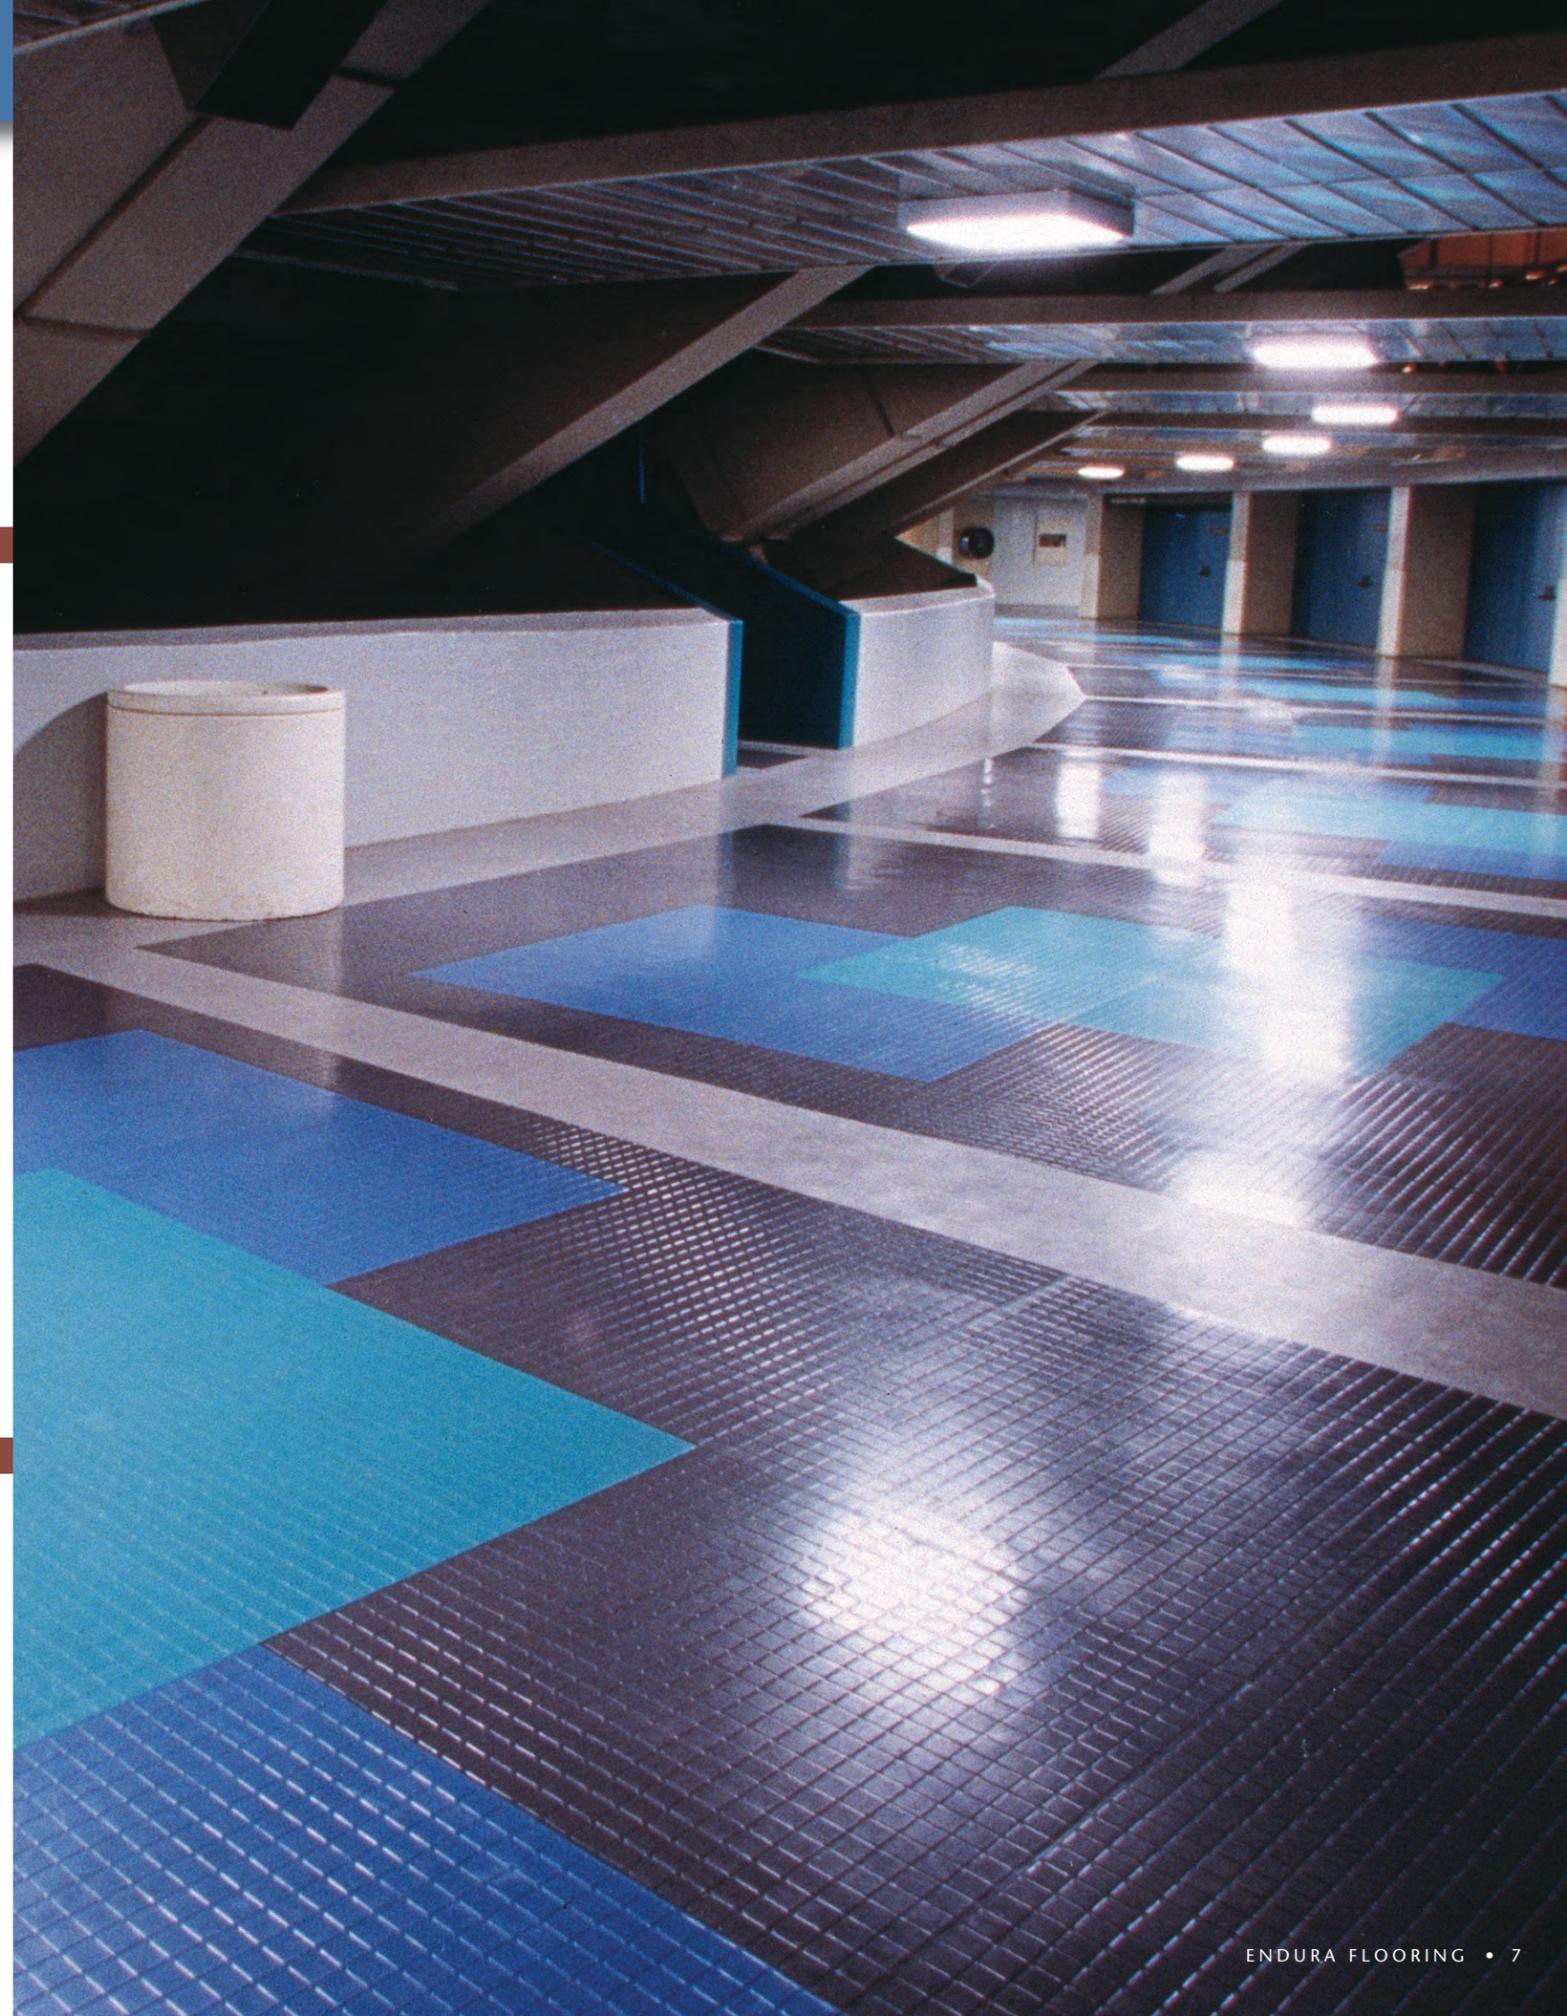




ROUND PROFILE - SQUARE NOSE & VISUALLY IMPAIRED

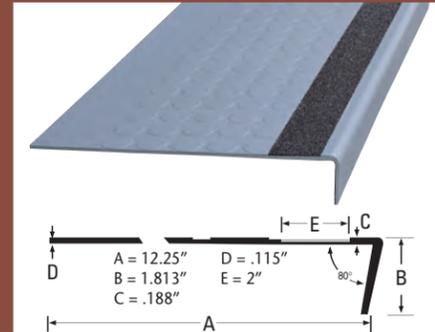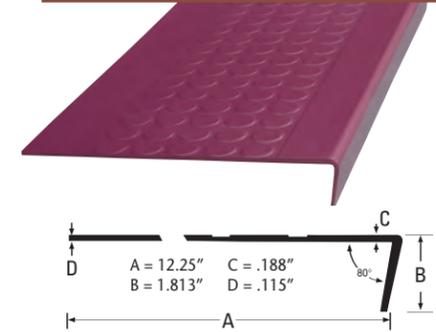

SQUARE PROFILE - SQUARE NOSE & VISUALLY IMPAIRED

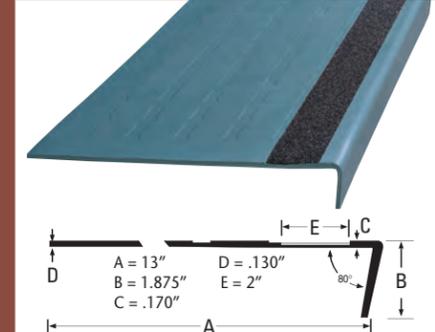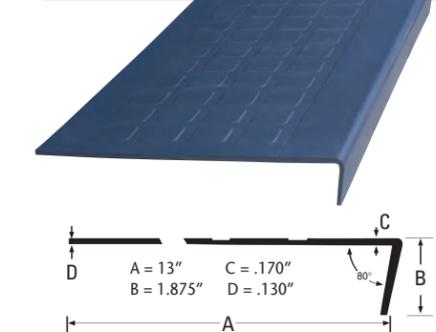

• Available in all Uni-Colors plus 5 additional colors

TECHNICAL DATA

All of our flooring products conform with ADA Accessibility Guideline Requirements that floors be stable, firm, and slip-resistant.

Treads: Product	Lengths	VI Strips	Relief
1/8" Round Profile	3', 4', 5', 6'	option	Round
1/8" Square Profile	3', 4', 5', 6'	option	Square
1/8" Uni-Step™	3', 4', 5', 6'	option	Round and Sculptured
1/8" Risers (7" height w/toe)	3', 4', 5', 6'	n/a	none
1/8" Risers (6" Cove)	4'	n/a	none
1/8" Skirting	12" x 36" slabs	n/a	none
1/8" Skirting (10" toeless base)	4'	n/a	none

Applicable Standards Tile: ASTM F-1344, Class 1A
Treads: ASTM F2169, Type TS, Class 2, Group 1 & 2
Risers & Skirting: ASTM F1861, Type TS, Group 1, Style A & B

Indentation Resistance ASTM F970 - .000" residual indent at 250 PSI

Flame Rating ASTM E-648, Class 1
ASTM E-84, Class B


All Visually Impaired stair treads meet the California Disabled Access regulations Title 24 for the visually impaired when used with contrasting strip color.



UNI-STEP™ ROUND & SCULPTURED PROFILE • SQUARE NOSE & VISUALLY IMPAIRED

The Uni-Step™ tread/riser combination provides a unique one-piece solution for fast and clean stair tread installations. The seamless flow from tread to riser also gives you an easy to clean surface.

Available in all 20 colors of the Uni-Color System, you are assured a color-coordinated installation from floor to tread to riser.



Available in Round and Sculptured Profiles


FLECKSIBLES® RUBBER TILE

Endura's Flecksibles collection provides durability, comfort and slip-resistance while creating an impressive look. The Flecksibles collection is comprised of 15 standard multi-color patterns. Each Flecksibles color-way consists of a standard Uni-Color base color and Uni-Color chips to create a dynamic non-directional design. This makes it easy to use solid Uni-Color tile with multi-color Flecksibles to create your own unique borders, patterns and designs. Add stair treads and risers for a complete flooring system.

Backed by a ten year warranty, Endura offers one of the best life-cycle flooring values available and is being used worldwide in thousands of commercial, institutional and industrial facilities.




STANDARD PROFILES- FLECKSIBLES

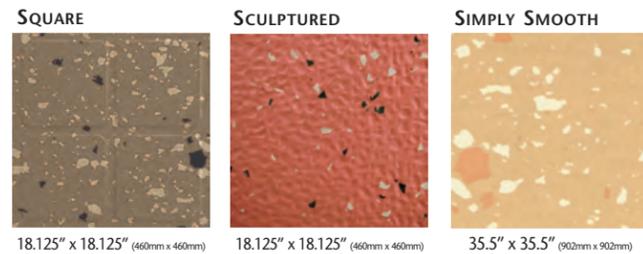

18.125" x 18.125" (460mm x 460mm) 18.125" x 18.125" (460mm x 460mm) 35.5" x 35.5" (902mm x 902mm)

SPECIAL ORDER PROFILES - FLECKSIBLES - (2,500 SQ.FT. MINIMUM)

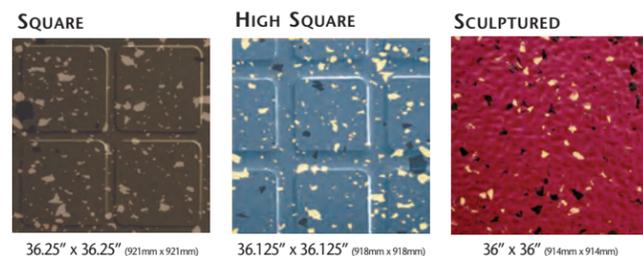

36.25" x 36.25" (921mm x 921mm) 36.125" x 36.125" (918mm x 918mm) 36" x 36" (914mm x 914mm)

TECHNICAL DATA

All rubber flooring products manufactured by Burke meet guidelines established by ADA for walking surfaces and for ramps.

Standard Profiles - Flecksibles Colors


Tile:	Relief Shape	Thickness	Size	Face	Back
	Square	.125"	18.125" x 18.125"	.025" Raised Profile	Smooth-Sanded
	Sculptured	.125"	18.125" x 18.125"	Sculptured	Smooth-Sanded
	Simply Smooth	.100"	35.5" x 35.5"	Smooth	Smooth-Sanded

Special Order Tile Profiles - Flecksibles Colors

	Square	.125"	36.25" x 36.25"	.025" Raised Profile	Smooth-Sanded
	High Square	.180"	36.125" x 36.125"	.050" Raised Profile	Smooth-Sanded
	Sculptured	.125"	36" x 36"	Sculptured	Smooth-Sanded

Applicable Standards	ASTM F-1344, Class 1A
Indentation Resistance	ASTM F-970 - .000" residual indent at 250 PSI
Flame Resistance	ASTM E-648, Class 1 ASTM E-84, Class B

Flecksibles®

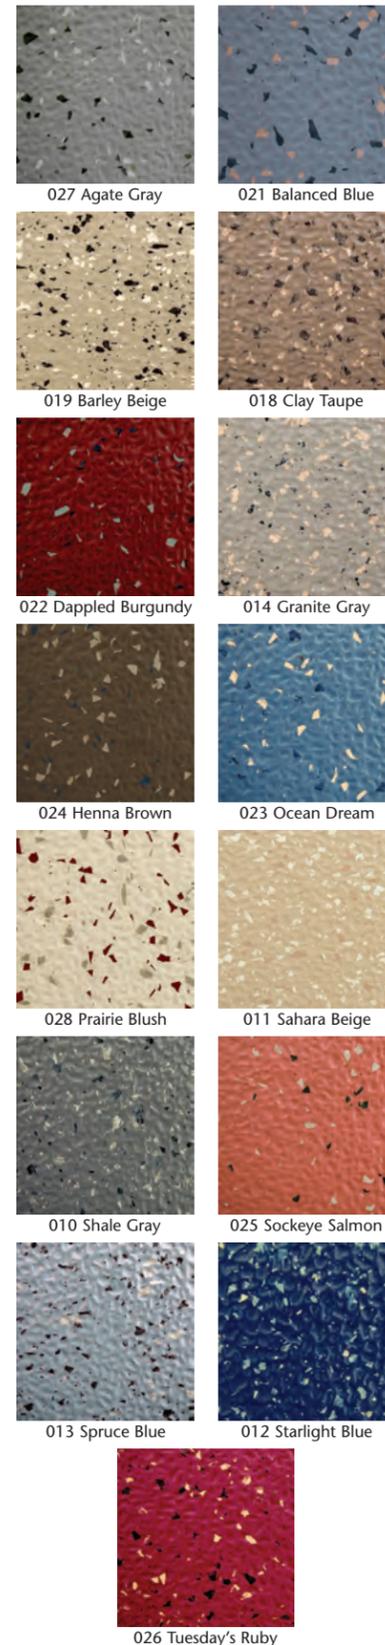


026 Tuesday's Ruby




Endura Rubber Stair Treads withstand heavy traffic, reduce noise, provide excellent slip-resistance and feature the same no-wax maintenance as Endura Rubber Tile. Endura's exceptional durability and high-performance compound eliminates nose breakage and cracking and does not require the additional cost of epoxy nose caulking. Endura is the only U.S.-based manufacturer to provide a warranty against both excessive wear for 10 years and against stair nose breakage for five years. Endura stair tread backs are sanded and free from contaminants that could inhibit a firm adhesive bond, thus ensuring an excellent value and a risk-free installation.



SQUARE PROFILE - SQUARE NOSE

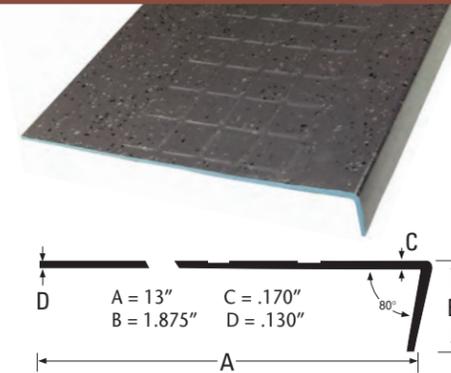

SQUARE PROFILE - VISUALLY IMPAIRED

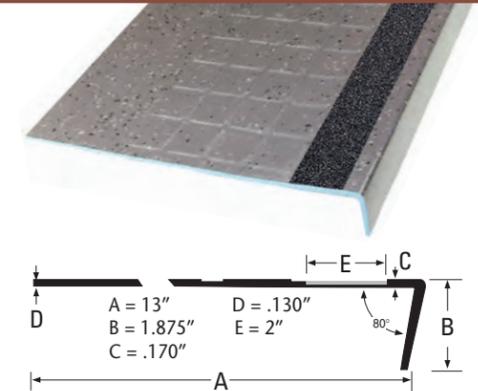

TECHNICAL DATA

All of our flooring products conform with ADA Accessibility Guideline Requirements that floors be stable, firm, and slip-resistant.

Treads:	Product	Lengths	VI Strips	Relief
1/8"	Square Profile	3', 4', 5', 6'	option	Square
1/8"	Uni-Step™ Profile	3', 4', 5', 6'	option	Sculptured
1/8"	Risers (7" height w/toe)	3', 4', 5', 6'	n/a	none
1/8"	Risers (6" Cove)	4'	n/a	none
1/8"	Skirting	12" x 36" slabs	n/a	none
1/8"	Skirting (10" toeless base)	4'	n/a	none

Applicable Standards
 Tile: ASTM F-1344, Class 1A
 Treads: ASTM F2169, Type TS, Class 2, Group 1 & 2
 Risers & Skirting: ASTM F1861, Type TS, Group 1, Style A & B

Indentation Resistance
 ASTM F970 - .000" residual indent at 250 PSI



Flame Rating
 ASTM E-648, Class 1
 ASTM E-84, Class B

All Visually Impaired stair treads meet the California Disabled Access regulations Title 24 for the visually impaired when used with contrasting strip color.




ENDURA UNI-STEP™ SINGLE PIECE STAIR TREAD AND RISER COMBINATION • SQUARE NOSE & VISUALLY IMPAIRED

Endura's Uni-Step speeds installation, reduces maintenance and provides a uniform seamless and contoured look. Uni-Step automatically adjusts for step depths of between 9.5 inches 13 inches. This also allows for adjustments to varying riser heights. Available in Endura's Sculptured profile with optional V. I. strip inserts. Uni-Step is available in 15 standard Flecksibles colors.

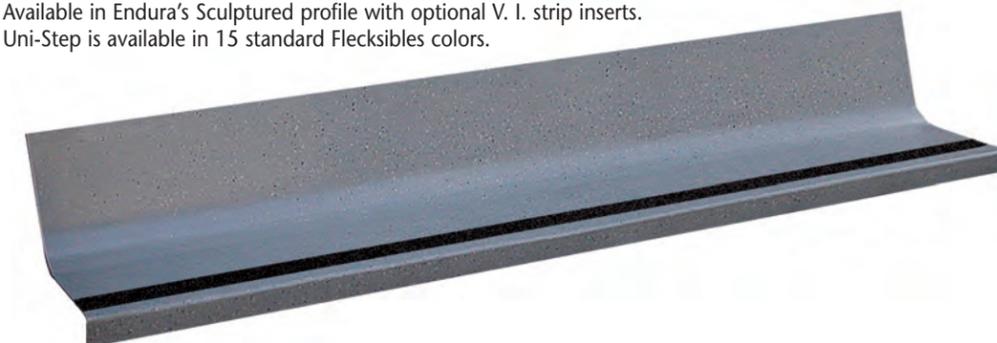

Available in Sculptured Profile only




EcoScore™ Recycled Multifunctional Flooring

- 67% Post Consumer Recycled Content
- Contributes toward achievement of LEED™ credits
- 10 Year Wear Warranty
- High Slip-Resistance




EcoScore is designed for multifunctional use in athletic facilities. Its two-ply construction consists of a 1/8" wear layer of 100% virgin rubber vulcanized to 1/4" performance layer of post-consumer recycled rubber and meets LEED™ requirements for recycled content.

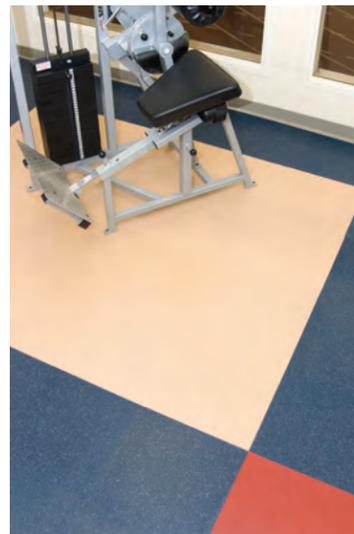


EcoScore is durable, has a cushioned anti-fatigue feel, reduces noise and provides excellent ball-bounce and impact-resistance. Its Sculptured, no-wax, abrasion-resistant surface is also highly slip-resistant.

EcoScore 24" x 24" tiles are available in Square Edge (permanent glue-down) and Interlocking Edge (temporary) styles.




Interlocking option

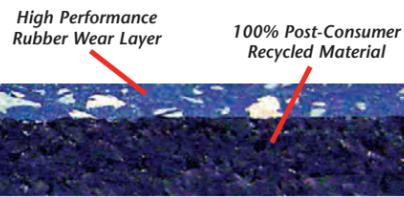


EcoScore Cut-Away

ECO SCORE™ STANDARD FLECKSIBLES (ALL OTHER FLECKSIBLES AVAILABLE FOR 2,500 SQ.FT. MINIMUM)

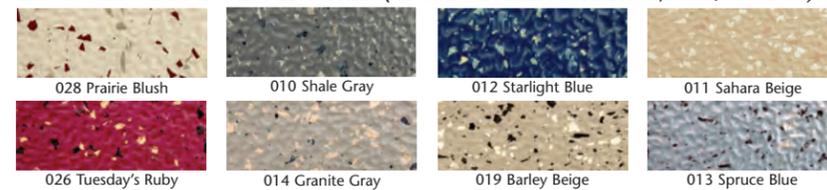

ECO SCORE™ STANDARD UNI-COLORS (ALL OTHER UNI-COLORS AVAILABLE FOR 2,500 SQ.FT. MINIMUM)

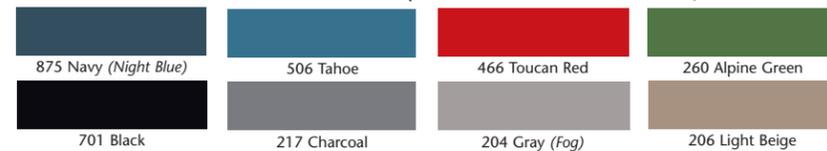

TECHNICAL DATA

All rubber flooring products manufactured by Burke meet guidelines established by ADA for walking surfaces and for ramps.


Thickness	Size	Back
.375"	24" x 24"	Smooth-Sanded
Applicable Standards	ASTM F-1344, Class II, A & B	
Fire Resistance	ASTM E-648, Class 1	

Endura SRT® Spike & Skate Resistant Tile


Endura's Skate and Spike Resistant Tile (SRT) withstands wear caused by spike and cleated athletic footwear and skate blades. It does not shread like carpeting, crumble or retain odors.

SRT's homogeneous construction, available in 6mm and 9mm thicknesses, provides the highest performance sports flooring solution available. SRT's Sculptured profile is available in 8 standard Flecksibles colors and 8 standard Uni-Colors (all other Flecksibles colors and Uni-Colors are available for a minimum order of 2,500 SQ.FT.).

SRT® STANDARD FLECKSIBLES (ALL OTHER FLECKSIBLES AVAILABLE FOR 2,500 SQ.FT. MINIMUM)

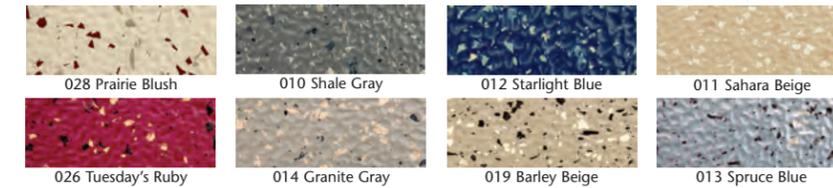

SRT® STANDARD UNI-COLORS (ALL OTHER UNI-COLORS AVAILABLE FOR 2,500 SQ.FT. MINIMUM)

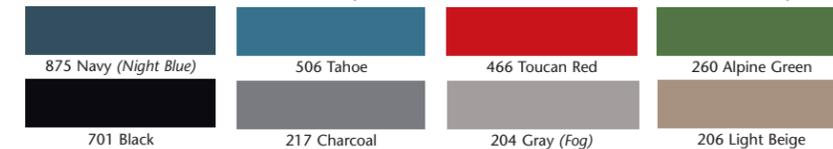

TECHNICAL DATA

All rubber flooring products manufactured by Burke meet guidelines established by ADA for walking surfaces and for ramps.

Thickness	Size	Back
.236" (6mm)	36" x 36"	Smooth-Sanded
.354" (9mm)*	36" x 36"	Smooth-Sanded
Applicable Standards	ASTM F-1344, Class 1, A & B	
Fire Resistance	ASTM E-648, Class 1	

* 2,500 SQ. FT. Minimum





FROM YOUR WILDEST DREAMS...
 ... TO SUBMITTAL STRIKEOFFS...
 ... TO AWARD-WINNING FLOORING DESIGN.

Endura SpectraColors is a custom color program featuring Flecksibles® and Solid colors. Minimum order size for each SpectraColor or custom color is only 2,500 square feet, but minimums can be less under certain circumstances. Matching SpectraColor stair treads and risers are also available. Contact Burke to request an individual sample of any SpectraColor or custom color. SpectraColor strike-off samples are sent within 10 working days of request. Color accuracy may vary. Burke assumes no responsibility for differences between sample colors shown and actual product colors.


Custom Colors: For a minimum order of 2,500 square feet, Endura tiles and stair treads can be custom color-matched to any color fabric, carpet, paint or other finish. Custom Flecksibles colors can include any solid base color, except white, and up to three different color "chips" made from Endura's Uni-Color solid base color selection. Call for details on submitting custom color-matched specs.



SPECTRASOLIDS • MINIMUM ORDER FOR EACH SPECTRACOLOR OR CUSTOM COLOR IS ONLY 2,500 SQ.FT. MINIMUM



SPECTRAFLECKS • MINIMUM ORDER FOR EACH SPECTRACOLOR OR CUSTOM COLOR IS ONLY 2,500 SQ.FT. MINIMUM

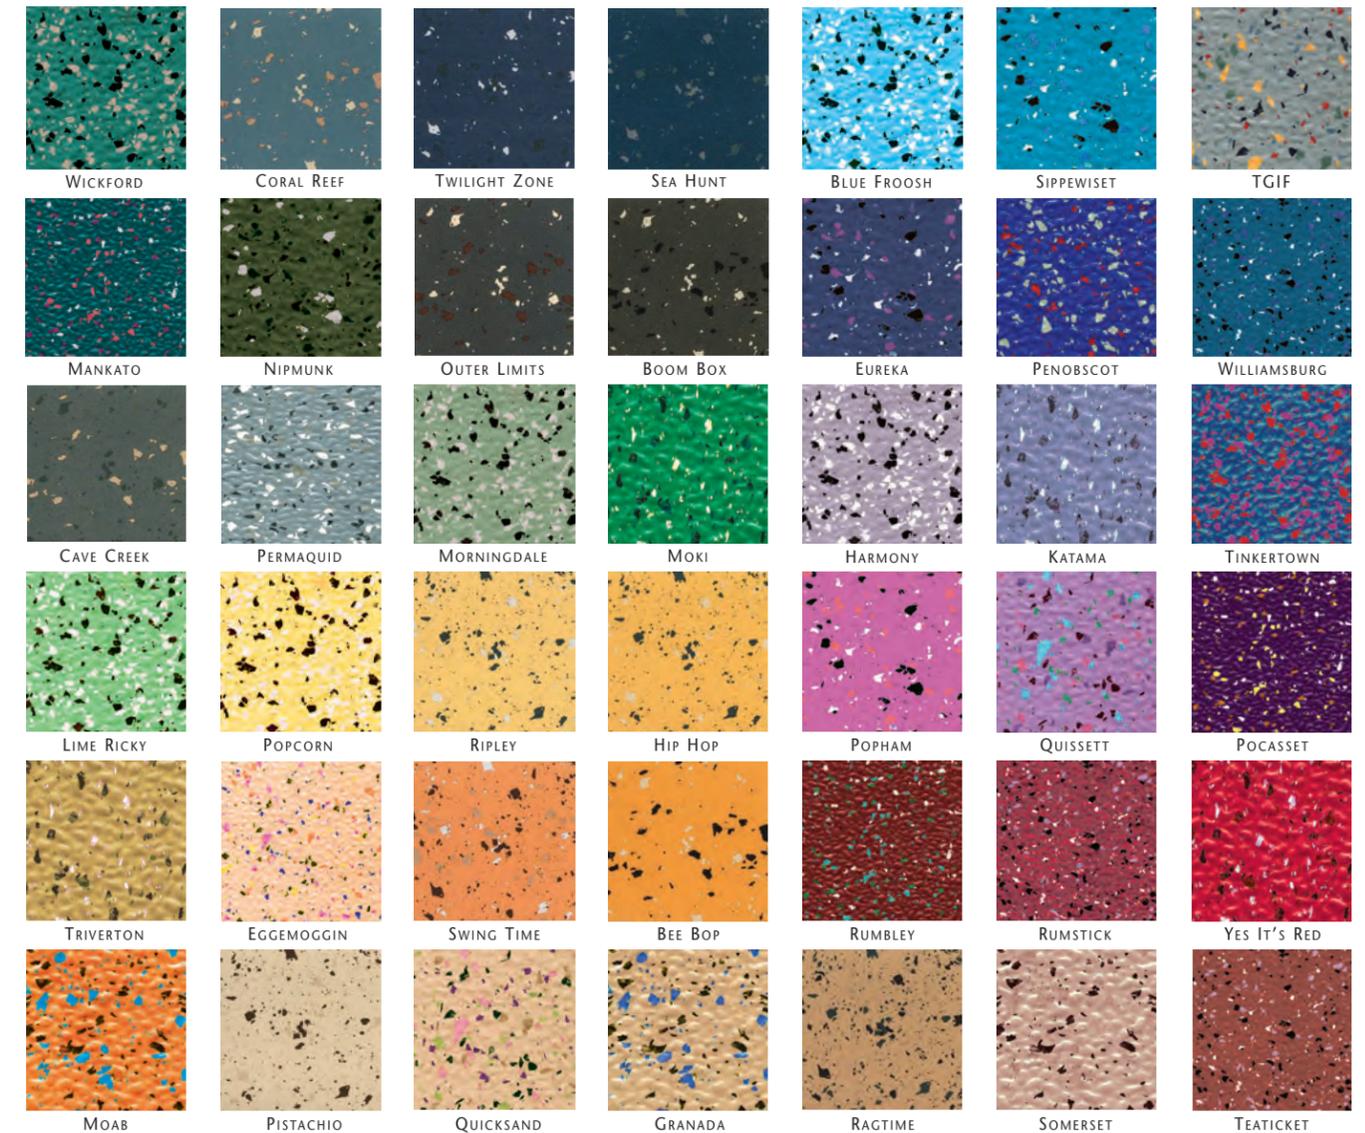

Custom Logo Creation

Virtually any logo or special design can be custom-created to exacting standards as an Endura tile or stair tread using most standard Endura colors and patterns. Simply submit the artwork you want for your design and we will get you a detailed quote.

It's a unique way to extend your identity into your facility.



Custom Pattern Creation

Now you can combine Endura colors, profiles and patterns to achieve dramatic new looks in rubber flooring.

Combine Flecksibles and Solid colors from Endura's Uni-Color and Flecksibles color programs. Then choose from the patterns shown below or develop your own.

With Endura's Spectrajet Program, you can add your own signature for added flair in an otherwise monolithic floor. Tie together color and design schemes within your interior using Spectrajet keyways of color. Or use your color and design combinations for border treatments or wayfinding.


For a truly striking effect, extend the pattern throughout your entire installation. Combine your color and pattern choices using the following process:

How to designate a Design:


1. Decide on a pattern.
2. Designate elements of the pattern: example: A, B, C, etc.
3. Indicate elements of the pattern to be colored.
4. Select colors from Endura Solids or Flecksibles.

Example:


- A = 206 Light Gray (Solid)
- B = 466 Toucan Red (Solid)
- C = 012 Starlight Blue (Flecksibles)





This custom tile...



...can be used to create these...

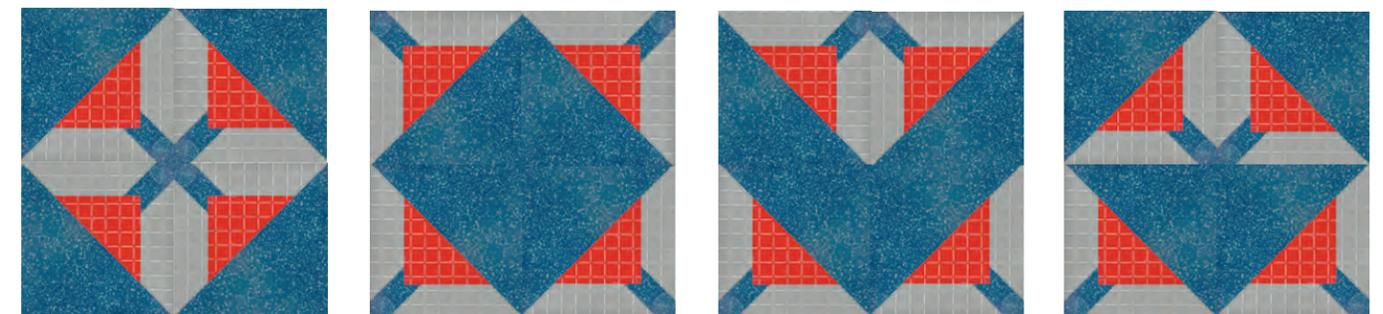

...and a pattern like this.

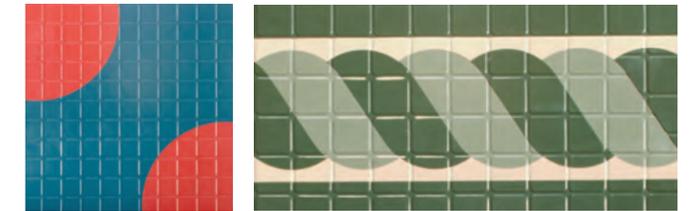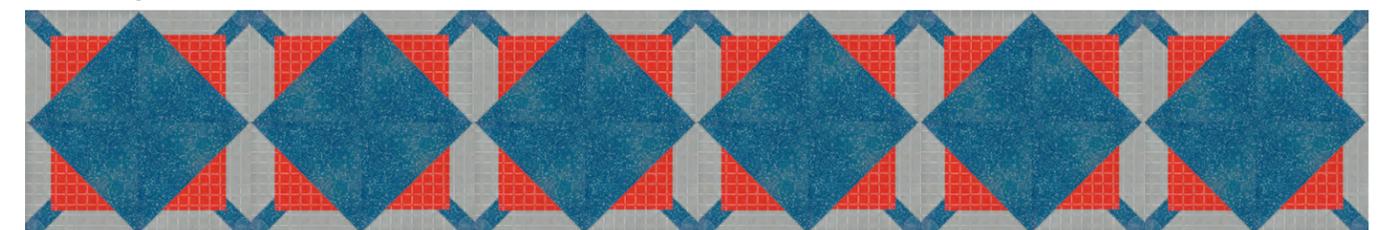

Endura Specialized Flooring Tile

Endura offers specialized flooring to meet demanding applications:



Endura UV® Ultra-Violet Light Resistant Tile*

Endura's UV formulation reduces the impact of ultra-violet rays on Endura products exposed to direct sunlight. *Minimums apply.*



Endura FR® Fire Retardant Tile*

Endura's FR formulation increases the fire retardance of Endura to a Class A rating when tested in accordance with ASTM E-84 fire test. *Minimums apply.*

As an integral part of the Flooring System, Burke adhesives are formulated to meet municipal, state and federal code compliance regulations. They do not contribute to IAQ (Interior Air Quality) problems when applied as instructed.

- Non-flammable formulations
- Adhesives must be used for warranty to apply
- Complete instructions on each unit

Burke Adhesives



Step-Bond Adhesive Tape
(FORMERLY ENDURA INSTA-STEP)

Burke Step-Bond is a super strong, double sided, self-adhesive tape developed for the installation of stair treads, risers and stringers. Step-Bond is available in either one-inch or six-inch wide rolls.

Step-Bond Tape is also suggested as an alternative adhesive for Burke's Rouleau Uni-Step Tread/Riser.

Step-Bond is a labor saving alternative to traditional canned glue with no applicators or messy clean-up. Simply roll tape onto tread or riser surface, peel off the protective paper backing and stick in place.



BR-711 (FORMERLY ENDURA 118)

Burke BR-711 Rubber and Vinyl Stair Tread and Tile Adhesive is specifically formulated for installing rubber tile, rubber and vinyl stair treads, risers, and stair nosings. BR-711 is a solvent-free aqueous adhesive that only needs to be applied to one surface. It allows repositioning of treads during installation. For above grade, porous, moisture-free wood or concrete substrates. Solvent-Free with no VOC emissions.

BR-715

Burke BR-715 Solvent-Free Epoxy Nose Filler prevents cracking or flexing of treads and nosings by uniformly molding a strong bonding support to the under step. When properly mixed it will not sag and will repair cracks, holes, depressions, worn and broken stair edges. This solvent-free epoxy may be used on wood, concrete, or non-galvanized metal stairs.

BR-721 (FORMERLY ENDURABOND 700)

Burke BR-721 Solvent-Free, Two-Part Epoxy Tile and Stair Tread Adhesive is used for 12 x 12 rubber tiles, Rouleau Tile, Rubber and Vinyl stair treads and nosings. BR-721 is for use over porous or non-porous substrates.

BR-725 (FORMERLY ENDURATHANE 600™)

Burke BR-725 is a solvent-free and nonflammable two-part adhesive. It will cure at subfloor temperatures to 50° F (7° C) and can be used where traces of old asphalt adhesive remains in slab pores. Can be used on porous or nonporous subfloors constructed of concrete, proper subfloor plywood, or metal. Use of Burke adhesives is required for Endura warranties to remain in effect.



Maintenance

Many products are available that can do a good job of cleaning and polishing rubber tile. Consult manufacturers, suppliers and janitorial services as to the suitability of a specific product for rubber tile maintenance.

Initial Cleaning

Wait several days, at least 48 hours, after installation before cleaning a new rubber floor. This allows time for the flooring to bond firmly. During this period the flooring should be protected against traffic. Heavy paper overlays are suggested to prevent scratching or damage from dirt, grime, plaster, etc.

Endura® tile has a special protective coating which acts as a protective layer against dirt during construction and must be removed before floor is used. To remove coating, sweep or vacuum the floor. Apply diluted Taski "Profi" (10 to 1) to area. Let solution act for 15 to 20 minutes (do not allow solution to dry). Scrub area with a single disc machine and a soft synthetic brush. Pick (wet vacuum) residue up and rinse with clear water. Allow floor to dry, and dry buff with single disc machine and soft synthetic or natural brush.

Normal Maintenance

After initial cleaning, Endura® tile can be maintained by simply sweeping or vacuuming the floor and spot cleaning with "Profi".

Occasional dry polishing with a single disc machine and a soft synthetic or natural brush will restore the tile's natural luster.

NOTE: Not recommended for outdoor use.

Cautions

Oil, grease, sweeping compounds containing oil, or treated mops should never be used. Do not use gasoline, kerosene, naphtha, or similar solvents to remove spots from rubber floors. Paste wax, paint, varnish, lacquer, shellac, or other solvent containing coatings should not be used on a rubber floor.

All recommendations for the use of these products are based on many years of experience. However, the use of these products is beyond the company's control, and Burke does not guarantee the results to be obtained nor accept any responsibility for injury or damage that may result from their use.

Limited Warranty

- Tile: 10 Year Limited Warranty
- Treads: 10 Year Limited Warranty
- Risers: 10 Year Limited Warranty
- Skirting: 10 Year Limited Warranty

All Products Will:

- Be free from defects in material and workmanship at the time of shipment.
- Conform, within reasonable variation allowable for this industry, to the description (size, color, pattern) on the sales order.
- Be sufficiently packaged and labeled.
- Not wear out within their respective warranty periods if properly installed, maintained, and used in the right conditions.

Warranties Will Be Void If:

- Burke Adhesives are not used.
- Products are not installed and maintained according to Burke instructions.
- Products are not first quality (ie. seconds, imperfections).
- Products are installed outdoors, in wet areas or in below freezing temperatures.


Conditions Or Affects Not Warranted:

- Exact color or pattern matches.
- Color degradation caused by sunlight or other excessive U.V. rays.
- Problems caused by excessive moisture, hydrostatic pressure, or alkali.
- Abuse or abnormal conditions.
- Tile installed in areas exposed to animal fat and petroleum byproducts.

Warranty Terms

Endura tile and treads, EcoScore, SRT, Endura EcoScore and other products in this catalog are covered by terms of the Burke's standard warranty. Additional warranty limitations for each of these products may also apply. See www.burkeflooring.com for full details.

Any defects must be reported to Burke within 30 days after discovery of defect. Always dry lay floor before installation to inspect for defects. Burke reserves the right to inspect all claims against our warranties. Burke will not be liable for shipping costs of assumed defective products if the product is found not to be defective. In the event that labor charges are paid, Burke will pay normal and reasonable rates consistent with industry standards as determined by Burke.

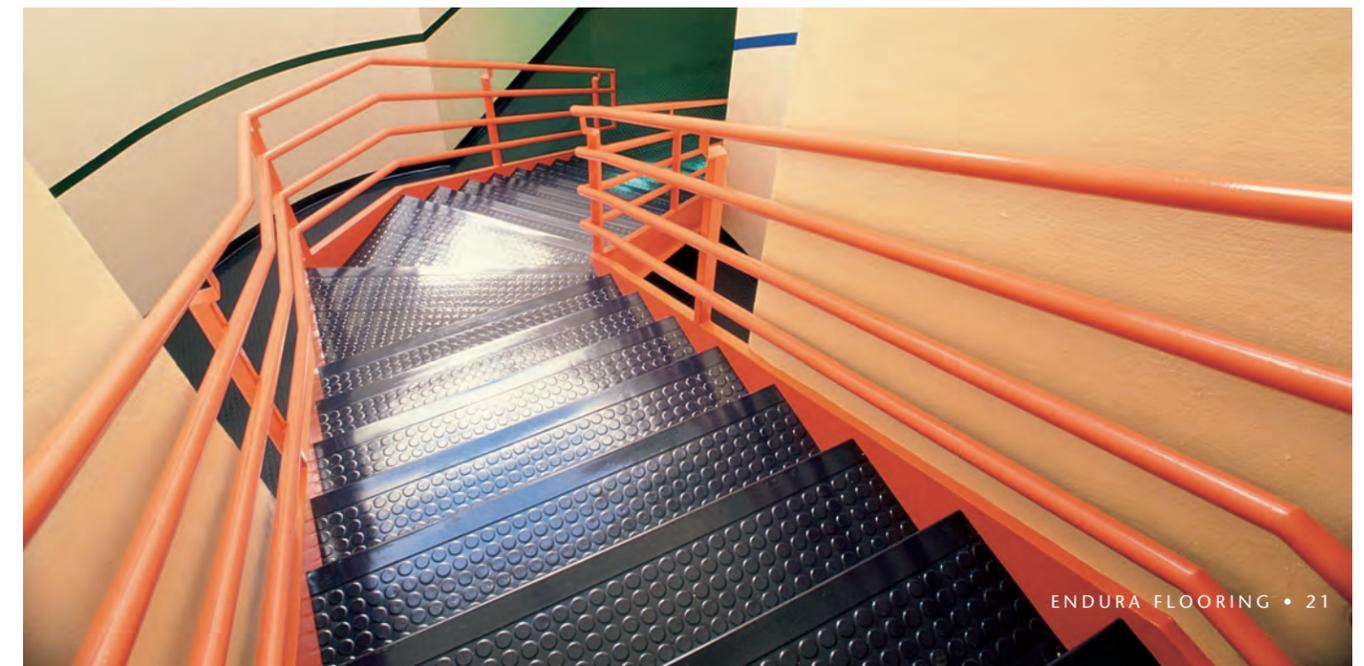

ARCHITECTURAL SPECIFICATIONS SHORT FORM

Complete long form or short form specifications are available at www.burkeflooring.com.

Rubber Floor Tile

All Endura Rubber Floor Tile [*specify*: solid, Flecksibles multi-color or SpectraColor (subject to stated minimums)] shown on the finish schedule or otherwise listed shall be furnished by Endura Rubber Flooring, a division of Burke Industries. All Endura Rubber Flooring products shall meet ASTM F-1344,

ADA slip-resistance recommendations and all other requirements as indicated in Endura literature. All Endura rubber solid color floor tile shall be [*specify*: Round, Square, Sculptured, Domino, Bison, High-Square, High-Round] and/or Flecksibles [*specify*: Sculptured, SimplySmooth or Square] pattern.

Rubber Stair Treads and Risers

All Endura Rubber Stair Treads [*specify*: solid, Flecksibles multi-color or SpectraColor (subject to stated minimums)] shown on the finish schedule or otherwise listed shall be furnished by Endura Rubber Flooring, a division of Burke Industries. All Endura Rubber Stair Treads products shall meet ASTM F-2169, ADA slip-resistance recommendations and all other requirements

as indicated in Endura literature. All Endura solid color stair treads shall be [*specify*: Round, Square, Diamond, Safety, One-Step] [*specify*: with or without] optional Visual Alert safety feature and/or Flecksibles [*specify*: Square or One-Step] pattern with [*specify*: Round or Square in 36", 48", 60", or 72" lengths].

The Environment...

Burke Flooring is committed to providing quality flooring products that consider the best use of natural resources and the long-term impact on the environment. To that end, we have established the following corporate directive:

"All new flooring products introduced to the market will include the use of sustainable and/or recycled materials".

Concurrent with this initiative we will work to reengineer our existing products to meet these same criteria. This reflects a commitment to the environment and one that both challenges and excites our team.

Burke's business philosophy has always been to provide clear and factual information about our products.

To simplify this process, we are introducing a new Environmental Symbol throughout our literature to identify products that contain a minimum of 10% Recycled Content and can contribute to LEED qualification points.

The first product to receive this seal is our new Ecoscore Multi-Purpose Sports Floor Tile. This product contains more than 60% post-consumer recycled content and is, in our opinion, the most environmentally responsible, high performance sports floor tile on the market.

We encourage you to visit our website at <http://www.burke-flooring.com> for the latest product information as we move forward in reengineering our product offering to meet our environmental commitment.

