



 **HALLMARK**  
**Product Collections**  
**2020**

**BOLICK DISTRIBUTORS**

2055 N. Airway Dr. Baton Rouge, LA 70815 \* 225-927-8016 \* Fax 225-927-0120  
5736 Blessey St. Harahan, LA 70123 \* 504-734-8175 \* Fax 504-734-7120  
4241 Space Center Dr. Jackson, MS 39209 \* 601-813-0074 \* Fax 601-961-1141  
S&J Floors 500 Flornoy Lucas Rd. Bldg.1 Shreveport, LA 71118 \* 318-470-5759  
Smart Choice Delivery 6005 Scott Hamilton Dr. Little Rock, AR 72209 \* 501-375-2333

## Features

Length:	Up to 6'2" RL
Width:	7½"
Thickness:	5/8" Engineered 4mm Sawn Cut Face
Finish:	Nu Oil®
Edge Detail:	Handcrafted Bevel
Certified:	EPA - TSCA Title VI Compliant 3rd Party Certified- Responsibly Harvested
TrueCore:	Third Party Certified
Warranty:	Limited Lifetime residential finish Limited Lifetime residential structural 3 year commercial finish 10 year commercial structural
Maintenance:	Clean with Nu Oil® Floor Cleaner. For full care and maintenance instructions visit <a href="http://HallmarkFloors.com/Floor-Care-Maintenance">HallmarkFloors.com/Floor-Care-Maintenance</a>

## Benefits

Finish:	Protective low sheen - provides a truly natural wood floor Guaranteed quality and durability - long lasting finish 100% Renewable with Hallmark's Restoration Oil
Wear Layer:	Ultra thick wear layer provides lasting durability Same wear layer as 3/4" solid wood floors Easier to repair or touch up if an accident occurs
Structure:	Greater dimensional stability than 3/4" solid Healthy indoor air quality




La Jolla Oak

## Trim Options

Stair Nose  
T-molding  
Threshold  
Reducer

## Installation

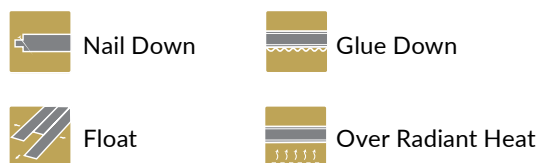

Installs over: concrete, wood, vinyl floors and radiant heat systems. Above, on or below grade.



Cambria Oak



La Jolla Oak AV75OLAJ



Pismo Oak AV75OPIS



Big Sur Oak AV750Big



Ojai Oak AV75OOJA



Carlsbad Oak AV75OCAB



Cambria Oak AV75OCAM



Malibu Oak AV75OMAL



Laguna Oak AV75OLAG



Del Mar Oak AV75ODEL



Balboa Oak AV75OBAL



Balboa Oak

## Features

Length:	Up to 6'2" RL
Width:	7"
Thickness:	1/2" Engineered 2.5mm Rotary Cut Face
Finish:	TrueMark® Poly
Edge Detail:	Pillowed Handcrafted Microbevel**
Certified:	EPA - TSCA Title VI Compliant FSC® Certified - Responsibly Harvested
TrueCore:	Third Party Certified
Warranty:	Limited Lifetime residential finish Limited Lifetime residential structural 5 year commercial finish 10 year commercial structural
Maintenance:	Clean with TrueClean® Floor Cleaner. For full care and maintenance instructions visit <a href="http://HallmarkFloors.com/Floor-Care-Maintenance">HallmarkFloors.com/Floor-Care-Maintenance</a>

## Benefits

Finish:	9 coats of Aluminum Oxide hand glazed satin finish Guaranteed quality and durability - long lasting finish 100% Renewable with Hallmark's XYZ
Wear Layer:	Thicker wood layer than industry standards Top layer provides lasting durability Vertically sliced - Delivers greater strength
Structure:	Greater dimensional stability than 3/4" solid Healthy indoor air quality



Pendleton Hickory

## Trim Options

Stair Nose  
T-molding  
Threshold  
Reducer

## Installation




Nail Down



Glue Down



Float



Over Radiant Heat  
(Excluding Hickory)

Installs over: concrete, wood, vinyl floors and radiant heat systems. Above, on or below grade. See complete installation instructions. Hallmark Hickory and Solid products are not approved for installation over Radiant Heat.



Laredo Maple



Pendleton Hickory CH7HPEN1



Stetson Hickory CH7HSTE1



Corral Hickory CH7HCOR1



Laredo Maple CH7MLAR1



Durango Maple CH7MDUR1



Wrangler Hickory CH7HWRA1



Chaps Maple CH7MCHP1



Rustler Maple CH7MRUS1



Sagebrush Hickory CH7HSGB1



Tackroom Hickory CH7HTAC1



Stetson Hickory

## Features

Length:	Up to 6' RL
Width:	4, 6 & 8" Random Width
Thickness:	1/2" Engineered 2mm Slice Cut Face
Finish:	TrueMark® Glaze Tek Poly
Edge Detail:	Handcrafted Microbevel
Certified:	EPA - TSCA Title VI Compliant FSC® Certified - Responsibly Harvested
TrueCore:	Third Party Certified
Warranty:	Limited Lifetime residential finish Limited Lifetime residential structural 5 year commercial finish 10 year commercial structural
Maintenance:	Clean with TrueClean® Floor Cleaner. For full care and maintenance instructions visit <a href="http://HallmarkFloors.com/Floor-Care-Maintenance">HallmarkFloors.com/Floor-Care-Maintenance</a>

## Benefits

Finish:	12 coats of Aluminum Oxide hand glazed satin finish Guaranteed quality and durability - long lasting finish 100% Renewable with Hallmark's XYZ
Wear Layer:	Same visuals as 3/4" solid wood floors Top layer provides lasting durability Vertically sliced - Delivers greater strength
Structure:	Greater dimensional stability than 3/4" solid Healthy indoor air quality



Terracotta Red Oak

## Trim Options

Stair Nose  
T-molding  
Threshold  
Reducer

## Installation



Nail Down



Glue Down



Float



Over Radiant Heat  
(Excluding Hickory)

Installs over: concrete, wood, vinyl floors and radiant heat systems. Above, on or below grade. See complete installation instructions. Hallmark Hickory and Solid products are not approved for installation over Radiant Heat.



Baccara Maple



Baccara Maple MY468BACM



Gaucho Hickory MY468GAUH



Bungalow Maple MY468BUNM



Puebla Hickory MY468PUEH



Caballero Maple MY468CABM



Ranchero Hickory MY468RANH



Casita Hickory MY468CASH



Chalet Red Oak MY468CHRO



Terreno White Oak MY468TEWO



Terracotta Red Oak MY468TCRO



Terreno Oak

## Features

Length:	Up to 6'2" RL
Width:	6"
Thickness:	7/16" nominal Engineered 1.5mm Slice Cut Face
Finish:	Nu Oil® (Oak) TrueMark® Glaze Tek (Maple & Hickory)
Edge Detail:	Handcrafted Microbevel
Certified:	EPA - TSCA Title VI Compliant 3rd Party Certified - Responsibly Harvested
TrueCore:	Third Party Certified
Warranty:	Limited Lifetime residential finish Limited Lifetime residential structural 3 year commercial finish (Nu Oil®) 5 year commercial finish (Glaze Tek) 10 year commercial structural
Maintenance:	Clean with Nu Oil® Floor Cleaner (Oak) Clean with TrueClean Floor Cleaner (Maple & Hickory) For full care and maintenance instructions visit HallmarkFloors.com/Floor-Care-Maintenance

## Benefits





Finish:	Protective low sheen - provides a truly natural wood floor (Oak) Guaranteed quality and durability - long lasting finish 100% Renewable with Hallmark's Restoration Oil (Oak) 100% Renewable with Hallmark's XYZ (Maple & Hickory)
Wear Layer:	Same visuals as 3/4" solid wood floors Top layer provides lasting durability Vertically sliced - Delivers greater strength
Structure:	Greater dimensional stability than 3/4" solid Healthy indoor air quality



## Trim Options

Stair Nose  
T-molding  
Threshold  
Reducer

## Installation

	Nail Down		Glue Down
	Float		Over Radiant Heat (Excluding Hickory)

Installs over: concrete, wood, vinyl floors and radiant heat systems. Above, on or below grade. See complete installation instructions. Hallmark Hickory and Solid products are not approved for installation over Radiant Heat.





Thoreau Hickory



Steinbeck Oak NO6STEO



Hemingway Oak NO6HEMO



Twain Oak NO6TWAO



Fitzgerald Oak NO6FITO



Hawthorne Oak NO6HAWO



Faulkner Hickory NO6FAUH



Melville Hickory NO6MELH



Frost Maple NO6FROM



Dickinson Maple NO6DICM



Thoreau Hickory NO6THOH



Eliot Hickory NO6ELIH



Harper Maple NO6HARM



Hawthorne Oak

## Features

Length:	Up to 6'2" RL
Width:	6"
Thickness:	7.5mm [overall with attached IXPE pad]
Finish:	Glaze Tek
Wear Layer:	1.2mm Slice Wood Veneer
Edge Detail:	Micro Bevel
Certified:	FloorScore® Certified
Construction:	PurCore RIGID+
Warranty:	Limited Lifetime residential finish Limited Lifetime residential structural 5 year commercial finish 10 year commercial structural
Maintenance:	Clean with TrueClean Floor Cleaner. For full care and maintenance instructions visit <a href="http://HallmarkFloors.com/Floor-Care-Maintenance">HallmarkFloors.com/Floor-Care-Maintenance</a>

## Benefits

Finish:	Hand glazed finishes with Aluminum Oxide & Nano Technology Guaranteed quality and durability - Long lasting finish 100% Renewable with Hallmark's XYZ
Wear Layer:	USFS & PEFC hardwood wear layer Dent resistant core   5,000 SPI Pure virgin vinyl & 60% stone aggregate
Structure:	Antibacterial and fungal control 100% FloorScore® Certified Increased wear & stain resistance   6k rotations



Harbor Oak

## Trim Options

Stair Nose  
T-molding  
Threshold  
Reducer

## Installation



Float



Over Radiant Heat  
\*excluding hickory

Installs over: concrete, wood, vinyl floors and radiant heat systems. Above, on or below grade.



Halyard Oak



Anchor Oak RE6ANCO



Ballast Maple RE6BALM



Compass Maple RE6COMM



Halyard Oak RE6HALO



Harbor Oak RE6HARO



Ketch Hickory RE6KETH



Leeward Oak RE6LEEO



Port Hickory RE6PORH



Sailmaker Maple RE6SAIM



Spinnaker Oak RE6SPIO



Starboard Hickory RE6STAH



Windward Hickory RE6WINH



Spinnaker Oak

## Features

Length:	Up to 6'2" RL
Width:	7½"
Thickness:	5/8" Engineered Sawn Cut
Finish:	Nu Oil® Super-Matte
Edge Detail:	Handcrafted Bevel
Certified:	EPA - TSCA Title VI Compliant
TrueCore <sup>2</sup> :	Core material made with quarter sawn pine lamella's
Warranty:	Limited Lifetime residential finish Limited Lifetime residential structural 3 year commercial finish 10 year commercial structural
Maintenance:	Clean with Nu Oil® Floor Cleaner. For full care and maintenance instructions visit <a href="http://HallmarkFloors.com/Floor-Care-Maintenance">HallmarkFloors.com/Floor-Care-Maintenance</a>

## Benefits

Finish:	Protective low sheen - provides a truly natural wood finish Guaranteed quality and durability - long lasting finish 100% Renewable with Hallmark's Restoration Oil
Wear Layer:	Ultra thick wear layer provides lasting durability Color goes all the way through the wear layer Easier to repair or touch-up if an accident occurs
Structure:	Greater dimensional stability than 3/4" solid Healthy indoor air quality




Amber, Pine

## Trim Options

Stair Nose  
T-molding  
Threshold  
Reducer

## Installation

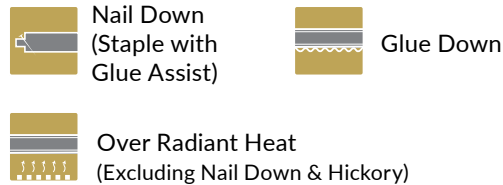

Installs over: concrete, wood, vinyl floors and radiant heat systems. Above, on or below grade. See complete installation instructions. Hallmark Hickory, Solid products and Nail Down installation is not approved for installation over Radiant Heat.

### True Wood Characteristics:

Using multiple species, natural salts, tannins & minerals are used to create light to heavy color contrast between boards, open & filled knots, splits & checks ranging from large to small. Heartwood and sapwood (light to dark) can be present and varied textures from light to heavy saw marks, wire brushing and hand sculpting. Refer to sample for a visual representation.

FOR MORE INFORMATION GO TO [HALLMARKFLOORS.COM](http://HALLMARKFLOORS.COM)  
FOR SAMPLES VISIT [HALLMARKFLOORS.COM/SAMPLE-REQUEST](http://HALLMARKFLOORS.COM/SAMPLE-REQUEST)

## DENT AND SCRATCH RESISTANT

The additional benefit of this wood treatment process - whether by nature or by our unique production technique – is a harder hardwood that is even more stable and more resistant to dents, wear and scratching. Our floors become high-performing hardwood floors especially suitable for commercial environments, as well as residential installation.

The True Collection by Hallmark Floors is the very first of its kind and is in a hardwood category all its own.



ONYX OAK



GARDENIA OAK



ORANGE BLOSSOM HICKORY



NEROLI OAK



LEMON GRASS OAK



ORRIS MAPLE



GINGER LILY OAK



MAGNOLIA HICKORY




SILVER NEEDLE OAK



JASMINE HICKORY



JUNIPER MAPLE



AMBER PINE



ONYX OAK

DIMENSIONS: 7.5" X 6'2" RL  
THICKNESS: 5/8" 3MM  
FINISH: NU OIL® SUPER-MATTE

## Features

Length:	Up to 6'2" RL
Width:	7½"
Thickness:	1/2" Engineered 2mm Slice Cut Face
Finish:	Nu Oil® (Oak) TrueMark® Glaze Tek Poly (Maple, Hickory, Walnut)
Edge Detail:	Handcrafted Microbevel
Certified:	EPA – TSCA Title IV Compliant - Clean air Certified Renewable Sourcing
TrueCore:	Third Party Certified
Warranty:	Limited Lifetime residential finish Limited Lifetime residential structural 3 year commercial finish (Nu Oil®) 5 year commercial finish (Glaze Tek) 10 year commercial structural
Maintenance:	Clean with NuOil® Floor Cleaner (Oak) Clean with TrueClean Floor Cleaner (Maple & Hickory) For full care and maintenance instructions visit <a href="http://HallmarkFloors.com/Floor-Care-Maintenance">HallmarkFloors.com/Floor-Care-Maintenance</a>

## Benefits

Finish:	Protective low sheen - provides a truly natural wood floor (Oak) Guaranteed quality and durability - long lasting finish 100% Renewable with Hallmark's Restoration Oil (Oak) 100% Renewable with Hallmark's XYZ (Maple & Hickory)
Wear Layer:	Same visuals as 3/4" solid wood floors Top layer provides lasting durability Vertically sliced - Delivers greater strength
Structure:	Greater dimensional stability than 3/4" solid Healthy indoor air quality







Sandal Oak

## Trim Options

Stair Nose  
T-molding  
Threshold  
Reducer

## Installation

	Nail Down		Glue Down
	Float		Over Radiant Heat (Excluding Hickory)

Installs over: concrete, wood, vinyl floors and radiant heat systems. Above, on or below grade. See complete installation instructions. Hallmark Hickory and Solid products are not approved for installation over Radiant Heat.



Sandbar Hickory



Mangrove Oak VE75MANO



Sandal Oak VE75SANO



Seashell Oak VE75SEAO



Marina Oak VE75MARO



Maritime Walnut VE75MARW



Tide Pool Maple VE75TIDM



Sand Castle Maple VE75SANM



Catamaran Hickory VE75CATH



Sandbar Hickory VE75SANH



Pearl Oak VE75PEAO



Maritime Walnut